


T-Bolt Clamps

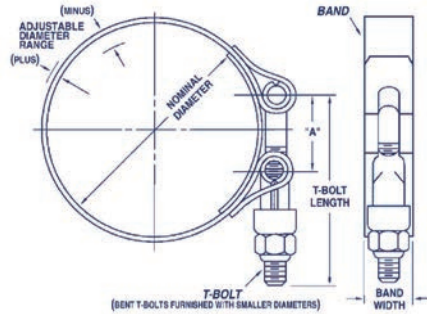

		Standard Series TBC & STBC	Heavy Duty Series HTBC & HSTBC	Long Bolt Series STBCL
"A"	center to center	1-3/16"	1-3/8"	2"
T-Bolt	thread size	1/4-28 UNF3A	5/16-24 UNF3A	1/4-28 UNF3A
	bolt length	2-1/2"	3-1/2"	3-1/2"
Band	width	3/4"	7/8"	3/4"
	thickness	.025	.040	.025

Standard Series

Style TBC

Features:

- can be applied with a standard 7/16" socket wrench
- 3/4" wide, .025" thick, 300 series stainless steel band
- alloy steel bolt, torque rating: 70 in/lbs



Hose OD		Part #	Opt Qty
from	to		
1.250"	1.406"	TBC131	25
1.344"	1.562"	TBC150	25
1.594"	1.812"	TBC175	25
1.724"	1.942"	TBC188	25
1.844"	2.062"	TBC200	25
2.094"	2.312"	TBC225	25
2.224"	2.442"	TBC238	25
2.344"	2.562"	TBC250	25
2.326"	2.622"	TBC256	25
2.396"	2.692"	TBC263	25
2.516"	2.812"	TBC275	25
2.646"	2.942"	TBC288	25
2.766"	3.062"	TBC300	25
2.886"	3.182"	TBC312	25
3.016"	3.312"	TBC325	25
3.266"	3.562"	TBC350	25
3.516"	3.812"	TBC375	25
3.586"	3.882"	TBC382	25
3.766"	4.062"	TBC400	25
4.016"	4.312"	TBC425	25
4.266"	4.562"	TBC450	25
4.516"	4.812"	TBC475	25
4.766"	5.062"	TBC500	25
5.016"	5.312"	TBC525	25
5.266"	5.562"	TBC550	25
5.516"	5.812"	TBC575	25
5.766"	6.062"	TBC600	25
6.016"	6.312"	TBC625	25
6.266"	6.562"	TBC650	25
6.516"	6.812"	TBC675	25
6.766"	7.062"	TBC700	25
7.266"	7.562"	TBC750	25

Style STBC

Features:

- can be applied with a standard 7/16" socket wrench
- 3/4" wide, .025" thick, 300 series stainless steel band
- 300 series stainless steel bolt, torque rating: 50 in/lbs



Hose OD		Part #	Opt Qty
from	to		
1.250"	1.4063"	STBC131	25
1.344"	1.562"	STBC150	25
1.474"	1.692"	STBC163	25
1.594"	1.812"	STBC175	25
1.724"	1.942"	STBC188	25
1.844"	2.062"	STBC200	25
1.964"	2.182"	STBC212	25
2.094"	2.312"	STBC225	25
2.224"	2.442"	STBC238	25
2.344"	2.562"	STBC250	25
2.326"	2.622"	STBC256	25
2.396"	2.692"	STBC263	25
2.516"	2.812"	STBC275	25
2.646"	2.942"	STBC288	25
2.766"	3.062"	STBC300	25
2.886"	3.182"	STBC312	25
3.016"	3.312"	STBC325	25
3.266"	3.562"	STBC350	25
3.386"	3.682"	STBC362	25
3.516"	3.812"	STBC375	25
3.586"	3.882"	STBC382	25
3.766"	4.062"	STBC400	25
4.016"	4.312"	STBC425	25
4.266"	4.562"	STBC450	25
4.516"	4.812"	STBC475	25
4.766"	5.062"	STBC500	25
5.016"	5.312"	STBC525	25
5.266"	5.562"	STBC550	25
5.516"	5.812"	STBC575	25
5.766"	6.062"	STBC600	25
6.016"	6.312"	STBC625	25
6.266"	6.562"	STBC650	25
6.516"	6.812"	STBC675	25
6.766"	7.062"	STBC700	25
7.016"	7.312"	STBC725	25
7.266"	7.562"	STBC750	25
7.766"	8.062"	STBC800	25
8.016"	8.312"	STBC825	25
8.266"	8.562"	STBC850	25
8.646"	8.942"	STBC888	25
8.766"	9.062"	STBC900	25
9.266"	9.562"	STBC950	25
9.766"	10.062"	STBC1000	10
10.646"	10.942"	STBC1088	10
11.766"	12.062"	STBC1200	10
12.646"	12.942"	STBC1288	10

T-Bolt Clamps

Heavy Duty Series



Features:

- can be applied with a standard 1/2" socket wrench.
- 7/8" wide, .040" thick, 300 series stainless steel band
- carbon steel bolt, torque rating: 240 in/lbs

style HTBC

Hose OD		Part #
from	to	
2.125"	2.4375"	<i>HTBC238</i>
2.250"	2.5625"	<i>HTBC250</i>
2.750"	3.0625"	<i>HTBC300</i>
3.250"	3.5625"	<i>HTBC350</i>
3.750"	4.0625"	<i>HTBC400</i>
4.250"	4.5625"	<i>HTBC450</i>
4.750"	5.0625"	<i>HTBC500</i>
5.250"	5.5625"	<i>HTBC550</i>
5.750"	6.0625"	<i>HTBC600</i>
6.250"	6.5625"	<i>HTBC650</i>
6.750"	7.0625"	<i>HTBC700</i>
7.250"	7.5625"	<i>HTBC750</i>
7.750"	8.0625"	<i>HTBC800</i>



Features:

- can be applied with a standard 1/2" socket wrench.
- 7/8" wide, .040" thick, 300 series stainless steel band
- 300 series stainless steel bolt, torque rating: 180 in/lbs

style HSTBC

Hose OD		Part #
from	to	
2.125"	2.4375"	<i>HSTBC238</i>
2.250"	2.5625"	<i>HSTBC250</i>
2.750"	3.0625"	<i>HSTBC300</i>
3.250"	3.5625"	<i>HSTBC350</i>
3.750"	4.0625"	<i>HSTBC400</i>
4.250"	4.5625"	<i>HSTBC450</i>
4.750"	5.0625"	<i>HSTBC500</i>
5.250"	5.5625"	<i>HSTBC550</i>
5.750"	6.0625"	<i>HSTBC600</i>
6.250"	6.5625"	<i>HSTBC650</i>
6.750"	7.0625"	<i>HSTBC700</i>
7.250"	7.5625"	<i>HSTBC750</i>
7.750"	8.0625"	<i>HSTBC800</i>
8.266"	8.562"	<i>HSTBC850</i>
8.646"	8.942"	<i>HSTBC888</i>
8.766"	9.062"	<i>HSTBC900</i>
9.266"	9.562"	<i>HSTBC950</i>
9.766"	10.062"	<i>HSTBC1000</i>
10.646"	10.942"	<i>HSTBC1088</i>
11.766"	12.062"	<i>HSTBC1200</i>
12.646"	12.942"	<i>HSTBC1288</i>

Long Bolt Series

Features:

- T-bolts can be applied with a standard 7/16" socket wrench.
- 3/4" wide, .025" thick, 300 series stainless steel band
- 300 series stainless steel bolt, torque rating: 50 in/lbs



style STBCL

Hose OD		Part #	Opt Qty
from	to		
2.80"	3.37"	<i>STBC325L</i>	25
3.05"	3.62"	<i>STBC350L</i>	25
3.37"	3.94"	<i>STBC382L</i>	25
3.55"	4.12"	<i>STBC400L</i>	25
3.75"	4.32"	<i>STBC420L</i> ¹	25
3.87"	4.44"	<i>STBC432L</i>	25
4.05"	4.62"	<i>STBC450L</i>	25
4.37"	4.94"	<i>STBC482L</i>	25
4.55"	5.12"	<i>STBC500L</i>	25
4.87"	5.44"	<i>STBC532L</i>	25
5.05"	5.62"	<i>STBC550L</i>	25
5.37"	5.94"	<i>STBC582L</i>	25
5.55"	6.12"	<i>STBC600L</i> ¹	25
5.87"	6.44"	<i>STBC632L</i>	25
6.05"	6.62"	<i>STBC650L</i>	25
6.30"	6.87"	<i>STBC675L</i>	25
6.53"	7.10"	<i>STBC698L</i>	25
6.55"	7.12"	<i>STBC700L</i> ¹	25

Hose OD		Part #	Opt Qty
from	to		
6.62"	7.19"	<i>STBC707L</i>	25
8.05"	8.62"	<i>STBC850L</i>	25
8.30"	8.87"	<i>STBC875L</i>	25
8.43"	9.00"	<i>STBC888L</i>	25
8.62"	9.19"	<i>STBC907L</i>	25
10.25"	10.82"	<i>STBC1070L</i>	25
10.43"	11.00"	<i>STBC1088L</i>	25
10.62"	11.19"	<i>STBC1107L</i> ¹	25
10.72"	11.29"	<i>STBC1117L</i>	25
12.20"	12.77"	<i>STBC1265L</i>	25
12.43"	13.00"	<i>STBC1288L</i>	25
12.75"	13.32"	<i>STBC1320L</i>	25
14.20"	14.77"	<i>STBC1465L</i>	25
14.43"	15.00"	<i>STBC1488L</i>	25
14.75"	15.32"	<i>STBC1520L</i>	25
16.20"	16.77"	<i>STBC1665L</i>	25
16.43"	17.00"	<i>STBC1688L</i>	25

¹ stock quantities only

Dixon, founded in 1916, is a premier manufacturer and supplier of hose couplings, valves, dry-disconnects, swivels, and other fluid transfer and control products. The company's global reach includes a wide range of products for numerous industries including petroleum exploration, refining, transportation, chemical processing, food & beverage, steel, fire protection, construction, mining and manufacturing. Dixon's strategic objective is to create solutions that make products safer, leak-free, longer lasting, and always available.

dixonvalve.com • *Customer Service:* **877.963.4966**



The Right Connection®

Dixon Valve

800 High Street, Chestertown, MD 21620

Fax: 800.283.4966



Dixon
Customer Service